

> SW2/A



SW2/A with Optional Welding Pad  
& Stand Alone Control Panel




PLC & touchscreen HMI

Welding pad option available on SW2/A with PLC: this feature allows perfect film tail management by welding film tail after cutting and spreading. Pallets with zero-tails specification.


This option is supplied packaged with cut & attach system, PLC, HMI control panel, remote radio control (optional) and safety fences according to CE rules. Additionally PLC allows to design customized working cycles according to your needs.

|         | Ø    | L    | W    | H    | KG max |
|---------|------|------|------|------|--------|
| SW2/A-L | 1650 | 1200 | 1000 | 2100 | 2000   |
| SW2/A-M | 1650 | 1200 | 1000 | 2600 | 2000   |
| SW2/A-H | 1650 | 1200 | 1000 | 3000 | 2000   |

> Reclining column hinged to the base



> Film roll dimensions





> Pallet dimensions

| SW2    | L    | W    | H              | KG max |
|--------|------|------|----------------|--------|
| Ø 1500 | 1200 | 800  | 2100/2600/3000 | 2000   |
| Ø 1650 | 1200 | 1000 | 2100/2600/3000 | 2000   |
| Ø 1800 | 1200 | 1200 | 2100/2600/3000 | 2000   |
| SW2-HS | L    | W    | H              | KG max |
| Ø 1500 | 1200 | 800  | 2100/2600/3000 | 1200   |



> Machine shown with safety fences and anti-intrusion barriers

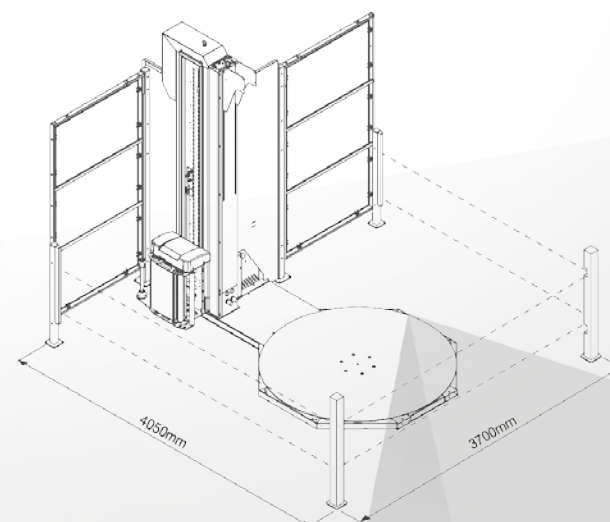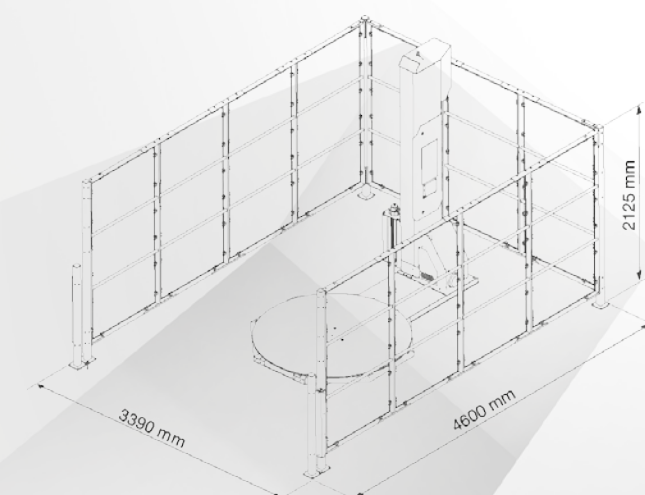

**SIAT**  
M.J. MAILLIS GROUP

**SW2range**

Semi Automatic Stretch Wrapper



Different film carriages available



**NANDEE  
STRAPAC**

PACKAGING  
PARTNER

**NANDEE-STRAPAC CO., LTD.**

310, 312 Soi Chan 32, Chan Road, Thung Wat Don, Sathorn, Bangkok 10120

Tel : 0-2675-5543-4, 0-2675-6656-7, 0-2675-6990

Fax : 0-2672-3266

E-mail : strapac@nandee.co.th

Website : www.nandeestrapac.com



# SW2

## SW2 is a Semi-Automatic Stretch Wrapper.

SW2 model is a semi-automatic machine for wrapping palletized loads with stretch film. Turntable soft start function, manual or automatic mode and film pallet over-lap adjustable. Can be equipped with mechanical / electromagnetic brake or powered prestretch carriages. High-end machine for intensive and demanding stretch film applications able to optimize film usage and to grant full control of all wrapping parameters.

### Key Features

- Platform diameter: 1650 mm
- Max pallet height: 2100 mm
- Max loading weight: 2000 Kgs
- Different sizes as option
- Belt driven carriage
- Film carriage with clutch (mechanical or electromagnetic - M/FM) or pre-stretch (motorized up to 300% - PW)
- Safety switch under film carriage
- Turntable speed adjustable by Inverter/ Soft Start & Fix Stop
- Carriage speed adjustable by inverter
- Control panel with advanced options and possibility to store up to 10 programs
- Turntable blocking feature to avoid movements during loading/unloading operations
- Photocell to detect pallet height
- Hinged column to turntable frame to facilitate machine installation and mobility
- Two forklift access point for machine easy repositioning

### Optionals



Standard control panel




Optional touchscreen HMI with PLC



- M Mechanical brake
- FM Electromagnetic brake
- SM Mechanical pre-stretch 30-60-90%
- PW Powered prestretch 150-200-250%
- PW750 Powered prestretch 150-200-250% (other ratio on request)




Carriage for net/mesh

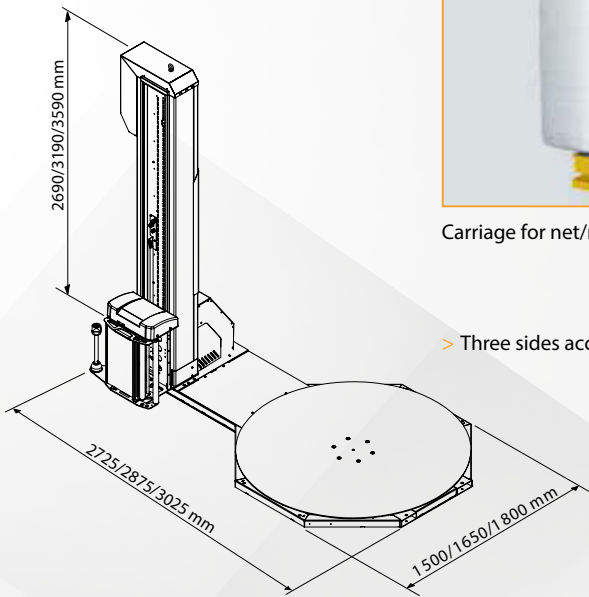

> Three sides accessibility

- SW2-L pallet height 2100
- SW2-M pallet height 2600
- SW2-H pallet height 3000

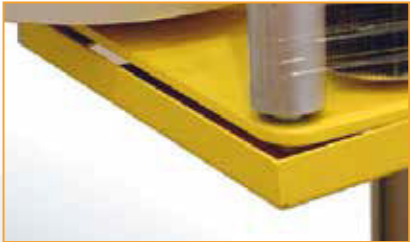

Safety device under carriage



Photocell for black film or colored products



Electric panel heater for environment temperatures from -5 °C to +5 °C

**NANDEE STRAPAC**

PACKAGING PARTNER

## NANDEE-STRAPAC CO., LTD.

310, 312 Soi Chan 32, Chan Road, Thung Wat Don, Sathorn, Bangkok 10120

Tel : 0-2675-5543-4, 0-2675-6656-7, 0-2675-6990

Fax : 0-2672-3266

E-mail : strapac@nandee.co.th

Website : www.nandeestrapac.com